

CRYOTECH CMA[®]

Solid Commercial Deicer



BENEFITS

- Less corrosive than tap water
- Safest deicer for concrete, chloride free
- Can be used on new concrete (dependent on quality), cured for at least 30 days
- Excellent inhibitor, reducing chloride corrosion
- Readily biodegradable, low toxicity
- Safer for pets than sodium chloride
- Requires fewer applications than other common deicers
- Can be used straight or mixed with salt, with sand, or as a liquid
- Spherical pellet is less dusty than granular deicers
- Complimentary customer training upon request

PERFORMANCE

- Works best above 20°F (-7°C)
- Has long lasting effect, better than chloride salts or urea
- Breaks/inhibits bond between snow/ice and pavement making snow/ice easier to remove
- Creates some brine and a dry, oatmeal-like consistency with snow for improved traction

ENVIRONMENT

- Biodegrades to carbon dioxide and water
- Safe for vegetation
- Calcium and magnesium increase soil permeability and are soil amendments
- Low toxicity to aquatic species
- Poor mobility in soil, unlikely to reach groundwater
- Safe for groundwater concerns
- Does not contain nitrogen or chlorides

APPLICATION

- Apply early in the storm to prevent snow/ice bonding
- First application:
 - Commercial = 15-20 lbs/1000ft² (75-100 g/m²)
 - Highway = 300-400 lbs/lane mile (20-40 g/m²)
- Allow time for CMA to penetrate and loosen the snow/ice pack before removing snow/ice
- Re-apply when new snow/ice accumulation shows first tendency to bond

HANDLING


- May be stored indefinitely if kept dry
- Avoid excess moisture which may cause caking
- Excessive handling may cause dustiness

See Reverse Side For Product Specifications
Test Data Available Upon Request
ISO 9001:2008 & 14001:2004 CERTIFIED COMPANY



PRODUCT SPECIFICATIONS - CRYOTECH CMA®

COMPOSITION	Calcium Magnesium Acetate (CMA) 3:7 Ca to Mg molar ratio Hydrated CMA + other acetates Inert Material	96% minimum 4% maximum
APPEARANCE	White to off-white spherical pellet	
BULK DENSITY	40 lbs/ft ³ to 44 lbs/ft ³ (0.65 g/cm ³ to 0.79 g/cm ³)	
PARTICLE SIZE	<u>Sieve</u> 4 14	<u>Particle Passing</u> 90 10
RESIDUAL BASE	Maximum of 0.4 meq base/g	
TYPICAL pH	8 to 10 in a 10% solution	
PACKAGING	55 lbs (25 kg) poly bags - 40 bag minimum 2205 lbs (1000 kg) Super Sacks - 1 super sack minimum Bulk - 20 metric ton minimum	

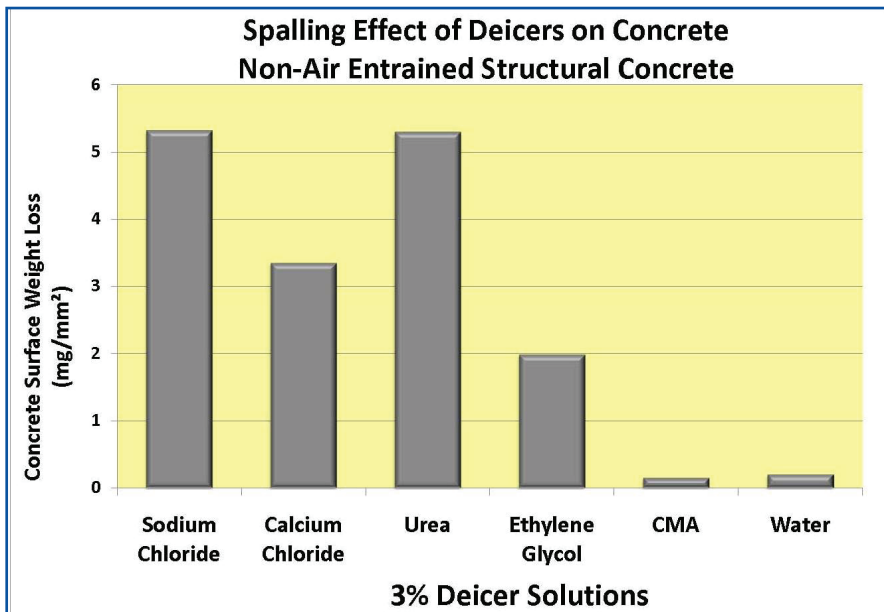

Source: Department of Transportation, UK 1993



TO ORDER OR FOR PRODUCT INFORMATION CONTACT:

Ph: 954-781-9200 or Fax: 954-781-9201

E-mail: orders@deicingdepot.com

Deicing Depot. 1254 SW 6Th Street . Pompano Beach, FL . 33069
WWW.DEICING.COM



ISO 14001
EMS 89384



ISO 9001
FM 39092